



# KAT 9000 BiFOLD

## ALUMINIUM BIFOLD DOORS



- MULTIPLE OPENING OPTIONS. UP TO 90% OF GLAZED SCREEN CAN BE OPENED.
- DUAL COLOUR OPTION AVAILABLE ALONG WITH ANY RAL NUMBER, WHICH MEANS YOU CAN HAVE ONE COLOUR INSIDE AND ANOTHER OUTSIDE FOR BEST DESIGN CHOICES.
- CONCEALED FITTINGS AND RUNNING GEAR WHICH IS AESTHETICALLY PLEASING.
- 2, 3, 4, 5, 6 OR 7 PANEL OPTIONS CAN OPEN IN OR OUT, FOLD IN OR OUT, OR OPTIONAL TRAFFIC DOOR WITH FOLDING PANELS.
- 34mm LOW THRESHOLD & 22mm ROOM DIVIDER TRACK AVAILABLE.
- MULTIPOINT LOCKING.
- ALL FOLDING & SLIDING DOORS INCLUDE WOOLPILE, HEAVY DUTY ROLLERS, STAINLESS STEEL TRACK.
- COMPLIANT WITH BUILDING REGULATIONS.
- SEVERE WEATHER RATED BS6375-1:2009, WATER 600PA, AIR 600PA, WIND PRESSURE 1800PA.
- VARIOUS MIDRAILS AVAILABLE.
- SUPPLIED UNGLAZED. 28mm GLAZING REQUIRED AS STANDARD.

### OPENING OPTIONS

Please reverse chart for reversable hand designs. Available opening in or out.  
For larger door combinations please call our sales office for further details.

ALL WIDTHS		STANDARD DESIGNS			
MIN	MAX	Folding Sliding Door			
1500	2000				
2100	3000				
2800	4000				
3500	5000				
4200	6000				
4900	6500				

#### SIZE RESTRICTIONS:

FRAME HEIGHT: Maximum 3000mm. Minimum 1600mm.

FRAME WIDTH: Maximum 6500mm. Minimum 1600mm.

PANEL WIDTH: Maximum 1000mm. Minimum 700mm.

Prior to delivery all folding and sliding doors will be fully assembled and their operation checked.

No responsibility will be accepted unless the doors have been installed fully square and level and in accordance with the code of practice for the installation of aluminium doors and windows (COP)W362/2.

AUGUST 2009

FAX TO: 0161 456 9779

www.katuk.co.uk



# KAT 9000 BiFOLD

ALUMINIUM BIFOLD DOORS



PLEASE TICK:  QUOTE  ORDER

**YOUR CONTACT DETAILS**

Company Name \_\_\_\_\_  
 Address \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_ Postcode \_\_\_\_\_  
 Telephone \_\_\_\_\_ Fax \_\_\_\_\_  
 Date \_\_\_\_\_  
 Order No. / Reference \_\_\_\_\_

Site Contact \_\_\_\_\_  
 Delivery Address \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_ Postcode \_\_\_\_\_  
 Telephone \_\_\_\_\_ Fax \_\_\_\_\_

Ordered by \_\_\_\_\_

**OPENING CONFIGURATION**  Inward  Outward

**PLEASE TICK WHICH DELIVERY OPTION YOU PREFER**

Fully assembled with outer frame joints sealed with silicon  
 Outer frame sealed but sashes separate  Kit Form

**SINGLE COLOUR**

Standard colour White RAL 9910 gloss finish  
 Other RAL No.....

**DUAL COLOUR**

Internal RAL..... External RAL.....

**FRAME WIDTH (mm)**.....

**FRAME HEIGHT (mm)**.....

Note: you must allow 10mm tolerance between your frame size and your opening size

**BOTTOM TRACK DETAIL**  Standard outerframe  
 34mm Low Threshold  22mm Room Divider

**DRAINAGE REQUIRED**

Yes  No

**CILL** requirements included in overall frame height (cill height is 25mm)

95mm  150mm  190mm  No cill

**HANDLES**

White  Black  Silver  Chrome

**MIDRAIL**

Yes


**MIDRAIL HEIGHT** from base of frame (mm).....

**BEAD**

Square Bead  Chamfered Bead

Clearly mark on the grid shown the configuration required. The elevation of the door is as viewed from the outside. Mark along the arrows the direction that each panel has to travel.

If you have 2 swing panels, indicate on this drawing which panel you would like to open first with 'FIRST'.

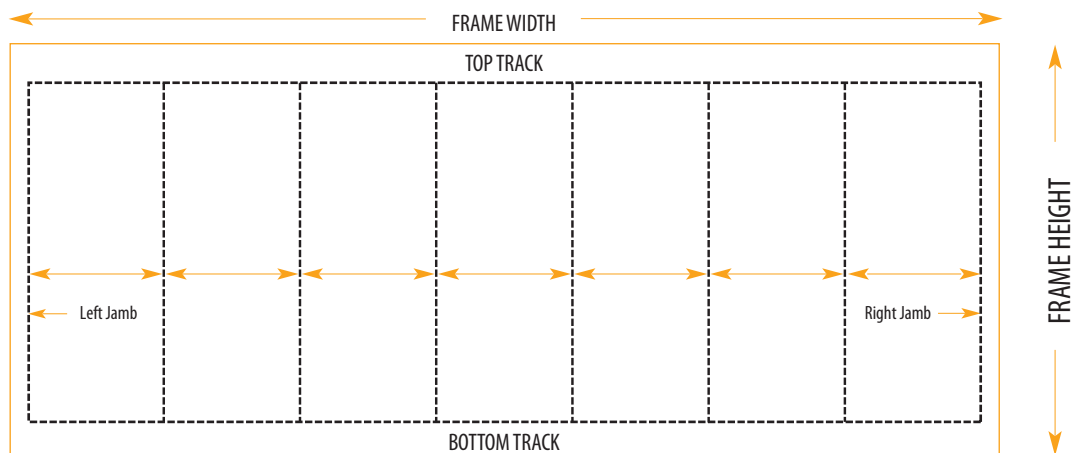

AUGUST 2009

FAX TO: 0161 456 9779

www.katuk.co.uk