



Aluminium Bifold Doors

TRADE
Quote/Order form
Aug 2016

Enquiry please quote Order please process

Date _____

Contact details

Ordered by _____

Company name _____

Address _____

Postcode _____

Telephone _____

Fax _____

Email _____

Order No. _____ Your Reference _____

Delivery date requested _____

Site Contact

Contact name _____

Delivery Address _____

Postcode _____

Telephone _____

Delivery option

Fully assembled with outer frame joints sealed with silicone

Outer frame sealed but sashes separate

Kit form

Overall frame width (mm) _____

Overall frame height (mm) _____

Door will be fitted in:

Sheltered location Exposed location

Opening direction Inward Outward

Cill requirements included in overall frame height

95mm 150mm 190mm No cill required

Note: Cill platform height is 25mm

Glazing

Glazed Unglazed

28mm, Toughened, Low E, Argon Filled, Black Warm Edge Spacer

Touch-up paint

Door has to comply with Document Q of the Building Regulations (additional costs apply for the PAS 24 specification product)
Note: 4-1-3, 6-1-5, 6-3-3 and 3-1-2 cannot comply with SBD

Keyed Alike

Note: Lead time will be increased if other components ordered

Bottom track detail

54mm standard threshold - weathered

34mm low threshold - non weathered not recommended for exposed locations

22mm room divider - non weathered

Single Colours

RAL 9910 Hipca White High Gloss

RAL 7016 Antracite Grey Matt

RAL 9005 Black Matt

RAL 7035 Light Grey Semi-gloss

RAL 9001 Cream Matt

Dual Colours

9005 Black Matt outside / 9910 Hipca White High Gloss inside

7016 Antracite Grey Matt outside / 9910 Hipca White High Gloss inside

Note: For other RAL colours, please request Schuco quote

1 x 5000 aluminium trickle vent through frame (includes 20mm add on to head)

No Black White Grey

Internal Bifold Yes Note: If bifold is internal, no drainage required

Grab handle/s Yes

10 Year Master Handles

White Black Grey

Satin Chrome Polished Gold




T Handle/s

Locking? Yes No

Black White Chrome Silver

Bead Square Chamfered

Opening configuration - viewed from outside

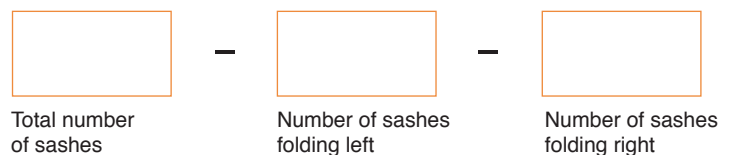

Ultron cylinder lock fitted as standard

KAT FAX: 01625 439 777

aluminium@katuk.co.uk www.katuk.co.uk

V8. AUG 16. JR


Features & benefits

- 2,3,4,5,6, or 7 panel options; can open in or open out.
- Traffic door option combined with folding panels
- 5 single colours and 2 dual colours from stock
- Stylish pop-out intermediate handle with key locking option
- Unique KAT 'grab' handle on sash rebate
- Choice of 3 thresholds; 54mm weathered. 22mm and 34mm not weathered
- Ultion Triple Star Diamond Rated Cylinder
- 54mm threshold is Severe Weather Rated BS6375-1:2009. Water 600 Pa, Air 600 Pa, Wind 1800 Pa.
- 28mm glazing as standard, can be 32mm triple glazed
- Marine grade paint finish available
- Concealed stainless fixings and stainless running gear
- Door can comply with Document Q of the Building Regulations (additional costs apply for the PAS 24 specification product). **Doors marked with * cannot comply with SBD as they require a finger bolt**
- Vanguard handles with 10 year warranty


Configuration options

All style numbers shown below can be manufactured to open in the opposite direction. For example, style 3-2-1 can be reverse handed to 3-1-2.


2 - 0 - 2




3 - 3 - 0




3 - 2 - 1*




4 - 1 - 3*




4 - 4 - 0




4 - 2 - 2




5 - 5 - 0




5 - 4 - 1




5 - 3 - 2




6 - 1 - 5*

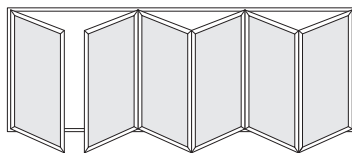


6 - 3 - 3*

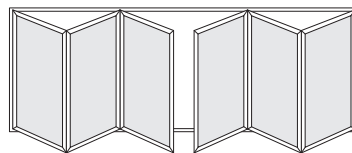

6 - 6 - 0

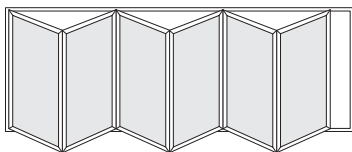

6 - 2 - 4

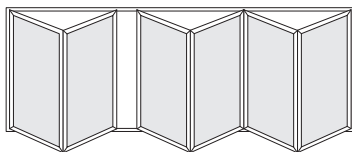

7 - 7 - 0

