

Enquiry please quote Order please process

Date _____

Contact details

Ordered by _____

Company name _____

Address _____

_____ Postcode _____

Telephone _____

Fax _____

Email _____

Order No. _____ Your Reference _____

Delivery date requested _____

Site Contact

Contact name _____

Delivery Address _____

_____ Postcode _____

Telephone _____

Outerframe

Outerframes are delivered in kit form. They must be assembled and sealed on site. Two tubes of sealant come with each door kit.

Overall frame width (mm) _____

Overall frame height (mm) _____

Cill requirements (25mm included in overall frame height)

177mm No cill required

22mm Add on to head Yes No

22mm Add on to Jambs Yes No

Glazing

Glazed Unglazed

Door has to comply with Document Q of the Building Regulations (additional costs apply for the PAS 24 specification product)

Keyed Alike

Door will be fitted in:

Sheltered location Exposed location

Single Colours

- RAL 9910 Hipca White High Gloss
- RAL 7016 Antracite Grey Matt
- RAL 9005 Black Matt
- RAL 7035 Light Grey Semi-gloss
- RAL 9001 Cream Matt

Dual Colours

- 9005 Black Matt outside / 9910 Hipca White High Gloss inside
- 7016 Antracite Grey Matt outside / 9910 Hipca White High Gloss inside

Note: For other RAL colours, please request Schuco quote

Drainage required Yes No

Sliding panel - internal standard. Tick box for external slider

10 Year Handles

- White Black Grey
- Polished Gold Satin Chrome



Pentalock and D handle

Handles At one end At both ends

Midrail (width 73mm)

Yes Midrail height (from base of frame) _____

Night Vent (1 x 5000mm² in frame + 22mm add on supplied)

Black White Grey


Bead

24mm 28mm 31mm

Configuration - viewed from outside

Please indicate below: fixed panel/s and direction of travel when viewed from outside.

X = slider O = fixed panel

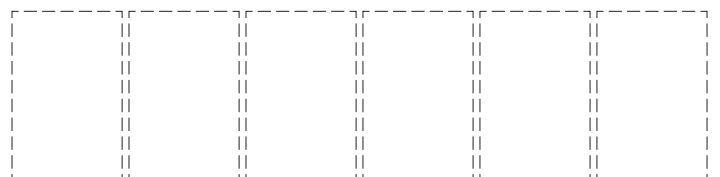

Ultion cylinder lock fitted as standard