

Kitemark™ Certificate

This is to certify that:

Kaliber Marketing (Holdings) Limited
T/A Kat UK
Unit 4 Newhaven Industrial
Beach Road
Newhaven
BN9 0BX
United Kingdom

Holds Certificate Number:

KM 651914


In respect of:

BS 4873 / PAS24
Enhanced Security Aluminium Window Fabricator

This issues the right and licence to use the Kitemark in accordance with the Kitemark Terms and Conditions governing the use of the Kitemark, as may be updated from time to time by BSI Assurance UK Ltd (the "Conditions"). All defined terms in this Certificate shall have the same meaning as in the Conditions.

The use of the Kitemark is authorized in respect of the Product(s) detailed on this Certificate provided at or from the above address.

For and on behalf of BSI:

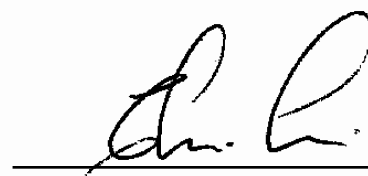

Chris Lewis - Certification Director, Product Certification

First Issued: 2017-10-23

Latest Issue: 2017-10-23

Effective Date: 2017-10-23

Expiry Date: 2020-10-22



Page: 1 of 3

...making excellence a habit.™

Kitemark™ Certificate

No. KM 651914

BS 4873:2009 / PAS 24:2016 - Enhanced security performance requirements for window assemblies

This Certificate covers the fabrication of windows from the range of profiles and components supplied by Schueco UK Ltd.

AWS 70 HI, AWS 70 SL HI Range

Fabrication and installation: Fabricated and installed in accordance with the latest issue(s) of the following Schueco UK Ltd controlled manual(s):

AWS 70 HI, AWS 70 SL HI Window and Door Fabrication Manual

System description: The windows are double glazed, internally beaded with BS EN 1279-2 compliant IGU(s) laminated on one pane to class P1A, with multipoint locking, with cleated and crimped joints. Windows are classified as W.

Ventilation: None

Window types: Tilt/turn windows Schueco AvenTec WK1 hardware system
Fixed windows

Size Limitations and Performance Characteristics

Window Type	Length (mm) - Maximum	Height (mm) - Maximum	Area(m ²) - Maximum	Friction Stays (up to and including)	Transom/Mullion Length (mm) inc frame - Maximum	Air Permeability classification	Watertightness classification	Resistance to Wind classification	Exposure category as given in Table 1 of BS 6375-1:2009 (except *)
Sash dimensions for windows with approved sash profiles:									
Tilt before turn	1700	2100	-	-	-	-	-	-	2000
Turn before tilt	1000	2500	-	-	-	-	-	-	2000
Turn Only	1000	2500	-	-	-	-	-	-	2000
Overall dimensions for windows with approved outer frame profiles:									
Fixeds	1635	2500	-	-	-	-	-	-	2000

First Issued: 2017-10-23

Effective Date: 2017-10-23

Latest Issue: 2017-10-23

Expiry Date: 2020-10-22

Page: 2 of 3

This certificate has been issued by and remains the property of BSI Assurance UK Ltd, Kitemark Court, Davy Avenue, Knowlhill, Milton Keynes MK5 8PP, United Kingdom and should be returned immediately upon request.

To check its validity telephone +44 (0) 345 080 9000. An electronic certificate can be authenticated [online](#).

Kitemark™ Certificate

No. KM 651914

BS 4873:2009 / PAS 24:2016 - Enhanced security performance requirements for window assemblies

This Certificate covers the fabrication of windows from the range of profiles and components supplied by Schueco UK Ltd

AWS 70 HI.BS Range

Fabrication and installation: Fabricated and installed in accordance with the latest issue(s) of the following Schueco UK Ltd controlled manual(s):

AWS 70 HI.BS Window and Door Fabrication Manual

System description: The windows are double glazed, internally beaded with BS EN 1279-2 compliant IGU(s) laminated on one pane to class P1A, with multipoint locking, with cleated and crimped joints. Windows are classified as W.

Ventilation: None

Window types: Tilt/turn windows Schüco AvenTec SimplySmart RC2 hardware system
Fixed windows

Size Limitations and Performance Characteristics

Window Type	Length (mm) - Maximum	Height (mm) - Maximum	Area(m ²) - Maximum	Friction Stays (up to and including)	Transom/Mullion Length (mm) inc frame - Maximum	Air Permeability classification	Watertightness classification	Resistance to Wind classification	Exposure category as given in Table 1 of BS 6375-1:2009
Sash dimensions for windows with approved sash profiles:									
Tilt before turn	1700	2100	-	-	-	-	-	-	1600
Turn before tilt	1000	2500	-	-	-	-	-	-	1600
Turn Only	1000	2500	-	-	-	-	-	-	1600
Overall dimensions for windows with approved outer frame profiles:									
Fixeds	1635	2500	-	-	-	-	-	-	1600

First Issued: 2017-10-23

Effective Date: 2017-10-23

Latest Issue: 2017-10-23

Expiry Date: 2020-10-22

Page: 3 of 3

This certificate has been issued by and remains the property of BSI Assurance UK Ltd, Kitemark Court, Davy Avenue, Knowlhill, Milton Keynes MK5 8PP, United Kingdom and should be returned immediately upon request.

To check its validity telephone +44 (0) 345 080 9000. An electronic certificate can be authenticated [online](#).