KAWNEER ALUMINIUM AA3720 BIFOLD DOORS

QUOTE/ORDER FORM

TRADE
ORDER FORM
JUNE 2018
V1.JUNE18.JR

☐ **Enquiry** please quote ☐ **Order** please process **Date** _____

Contact Details

Ordered By _____

Company Name _____

Address _____

_____ **Postcode** _____

Telephone _____

Fax _____

Email _____

Order No. _____

Your Reference _____

Delivery Date Requested _____

Site Contact

Contact Name _____

Delivery Address _____

_____ **Postcode** _____

Telephone _____

Delivery option

☐ Fully assembled with outer frame joints sealed

☐ Kit form

If 6m wide or 2.2m high will be delivered in kit form

Overall frame width mm _____

Overall frame height mm _____

Door will be ftted in:

☐ Sheltered location ☐ Exposed location

Opening direction ☐ Inward ☐ Outward

Flat sash as standard ☐ Rounded sash

Cill requirements included in overall frame height

☐ 104mm ☐ 159mm ☐ 199mm ☐ No cill required

Note: Cill platform height is 25mm included in the overall height. 10mm add leg on back edge of cill

Glazing

28mm, Toughened, Low E, Argon Filled, Black Warm Edge Spacer

☐ Glazed ☐ Unglazed

☐ 28mm square bead ☐ 32mm square bead

☐ 44mm square bead ☐ 36mm square bead

☐ **Touch-up paint**

☐ **Door has to comply with Document Q of the Building Regulations** (additional costs apply for the PAS 24 specification product) Note: 3-2-1 and 3-1-2 can comply with PAS 24

☐ **Keyed Alike**

Bottom track detail

☐ 45mm standard threshold - with full weather rating

☐ 24mm low threshold - not severe weather rated

☐ 24mm add on ☐ 15mm coupler

not recommended for exposed locations

Stock Colours on a 2 week lead time

☐ RAL 7016 Textured Anthracite Grey ☐ RAL 9016 Textured White

☐ RAL 7016 Anthracite Grey Matt ☐ RAL 9016 White Gloss

☐ RAL 7016 Textured Anthracite Grey outside / RAL 9016 Textured White inside

☐ RAL 7016 Anthracite Grey Matt outside / RAL 9016 Traffic White inside

Available on a 3 week lead time

☐ RAL 9005 Textured Jet Black ☐ RAL 7035 Textured Light Grey

☐ RAL 7015 Textured Slate Grey

Other RAL Colour on a 5-6 week lead time: _____

Marine Grade Finish ☐ Yes ☐ No

Note: Mandatory within 500 metres of the sea, tidal estuary or in a swimming pool or any other chemical or industrial environment

1 x 5000 aluminium trickle vent through 34mm add-on profile

(includes 20mm add on to head)

☐ No ☐ Black ☐ White ☐ Grey

Internal Bifold ☐ Yes (Note:If bifold is internal, no drainage required)

10 Year Master Handles

☐ White ☐ Black ☐ Grey

☐ Satin Silver ☐ Chrome ☐ Polished Gold

Locking intermediate handle/s

☐ White ☐ Black ☐ Brushed Steel ☐ Satin Silver

☐ **D Handle - black only**

Opening configuration - viewed from outside

	–		–	
Total number of sashes		Number of sashes folding left		Number of sashes folding right

KAWNEER ALUMINIUM AA3720 BIFOLD DOORS

QUOTE/ORDER FORM

TRADE
ORDER FORM
JUNE 20178

V1.JUNE18.JR

Features & benefts

- 2,3,4,5,6 or 7 panel options; can open inwards or outwards
- Traffic door option when there is an odd number of door sashes. Note: configurations marked # will not have a traffic door or master handle externally
- Flat sash as standard – option for rounded sash
- Standard finishes are textured Anthracite Grey, textured White and dual colour textured Anthracite Grey outside/textured White inside, Anthracite Grey Matt, Traffic White Gloss and dual colour Anthracite Grey Matt outside/ Traffic White Gloss inside. Other RAL finishes available on longer lead time
- Intermediate locking handle in four finishes; Black, White, Chrome, Brushed Steel
- D handle supplied in Black
- Hook lock to master door – 5 point locking
- 28mm Low U Value – with DGU with centre pane of 1.0, full door indicative U Value of 1.4 W/m^{2}K°
- 32mm and 44mm glazing with square bead can be accommodated and a centre pane of 1.0 glass gives 1.4 U-value frame
- U-value of 1.0 can be achieved with 0.7 W/m2K triple glazing
- Choice of 2 thresholds; 45mm is severe weather rated BS6375-1:2009. Water 750 Pa, Air 600 Pa, Wind 1800 Pa. 24mm low threshold is not weathered
- Option for Marine Grade (note this is required within 500 metres of the sea, tidal estuary or in a swimming pool or any other chemical or industrial environment).
- Door can comply with Document Q of the Building Regulations (additional costs apply for the PAS 24:2016 specification product).
- 10 year warranty, includes hardware

Confguration options

All style numbers shown below can be manufactured to open in the opposite direction.
For example, style 3-2-1 can be reverse handed to 3-1-2.

2 - 0 - 2 #



3 - 3 - 0



3 - 2 - 1*



4 - 1 - 3*



4 - 4 - 0 #



4 - 2 - 2 #



5 - 5 - 0



5 - 4 - 1



5 - 3 - 2



6 - 1 - 5*

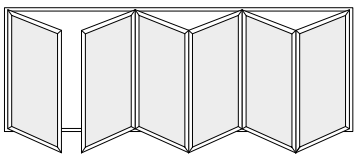

6 - 3 - 3*

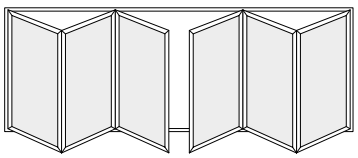

6 - 6 - 0 #

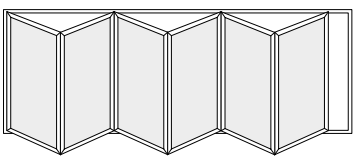

6 - 2 - 4 #

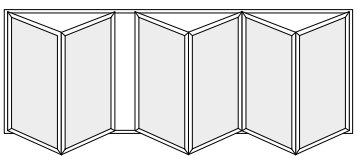
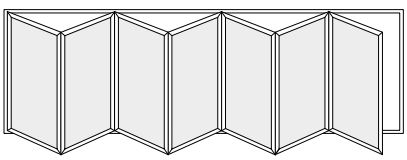
7 - 7 - 0