

Enquiry please quote Order please process

Date _____

Contact details

Ordered by _____
 Company name _____
 Address _____
 _____ Postcode _____
 Telephone _____
 Fax _____
 Email _____
 Order No. _____ Your Reference _____
 Delivery date requested _____

Site Contact

Contact name _____
 Delivery Address _____
 _____ Postcode _____
 Telephone _____

Standard colours (please tick box)

- White Cream* Golden oak Rosewood
 Irish oak White ash Golden oak on white
 Rosewood on white Irish oak on white
 Black ash on white Grey ash on white
 Other Please specify _____

* Cream is through colour PVCu, not foiled.

Overall frame width (mm) _____

Overall frame height (mm) _____

These overall sizes must include any cill or add-ons requested.
 Note: Finished sizes must allow minimum 10mm tolerance between overall frame sizes and aperture.

Opening direction Inward Outward

Glazing Glazed Unglazed
 28mm, Toughened, Low E, Argon Filled, Black Warm Edge Spacer

Door has to comply with Document Q of the Building Regulations (additional costs apply for the SBD specification product)

Keyed Alike



Ultion cylinder lock fitted as standard

Optional extras (please tick box)

- Frame extension to head 15mm 25mm 50mm
 Frame extension to base 25mm 50mm
 Frame extension 25mm Left Right
 Frame extension 50mm Left Right
 Bead - black gasket Chamfered Ovolo
 65mm threshold *Weathered*
 Aluminium room divider *Not weathered* 15mm
 Aluminium low threshold *Weathered - not suitable with a cill* 30mm
 Doc. M compliant ramp Internal External
 Night ventilator in 50mm add-on Yes
 Glazing packer set
 Touch-up pen

Cill requirements included in overall frame height

- 85mm 150mm 180mm No cill required

10 year warranty handles - master door only

- White Black Satin Grey
 Chrome Polished gold

Handles - locking master door

- White Black Satin Champagne Chrome

Bifold D handles

- White Black Satin Champagne

(No chrome D handle available)

Hinges

- White Black Satin Champagne

Opening configuration - viewed from outside



Features & benefits

- Multiple opening options. Up to 90% of glazed screen can be opened.
- 2, 3, 4, 5, 6 or 7 panel options can fold in or out and slide towards left or right. Optional traffic door only available on certain configurations.
- BS 6375, PAS 23 and PAS 24 certified.
- Extreme weather tested on standard and low thresholds.
- Multipoint high security locking with shootbolts.
- All folding & sliding doors include heavy duty rollers & stainless steel anti jemmy pins.
- Aluminium low threshold 30mm high, requires ramps for wheelchair access (fully Document M compliant). Not suitable with cill.
- Aluminium room divider 15mm high (internal use only).
- 28mm glazing as standard.
- 10 year guarantee*
- We strongly recommend dark coloured doors are not situated on south facing elevations due to thermal expansion which may effect the opening/closing action of the door.
- Ultion cylinder fitted as standard
- Vanguard handles with 10 year guarantee fitted as standard

Size & weight restrictions

	Maximum	Minimum
Height:	2300mm	1000mm
Overall width:	6000mm	1200mm
Panel width :	900mm	600mm
Weight per panel:	80kg	

Door has to comply with Document Q of the Building Regulations (additional costs apply for the SBD specification product)

Prior to delivery all KAT UK folding and sliding doors will be fully assembled and their operation carefully checked.

Doors must be installed fully square and level, glass packed and toe and heeled correctly to ensure smooth operation. Full installation instructions are supplied with every door and can be found on our website.


* 10 year guarantee on profile operation and Vanguard handles.
1 year on hardware. Subject to our standard terms and conditions.

Configuration options


All style numbers shown below can be manufactured to open in the opposite direction. For example, style 3-2-1 can be reverse handed to 3-1-2.

On these styles, there is no traffic door and doors can only be opened from the inside of the property.


2 - 0 - 2 #




3 - 3 - 0




3 - 2 - 1




4 - 1 - 3




4 - 4 - 0 #




4 - 2 - 2 #




5 - 5 - 0




5 - 4 - 1




5 - 3 - 2




6 - 1 - 5

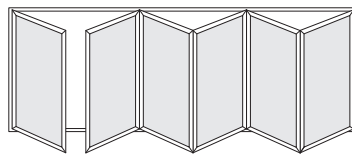


6 - 3 - 3

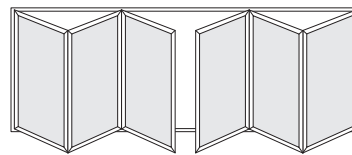

6 - 6 - 0 #

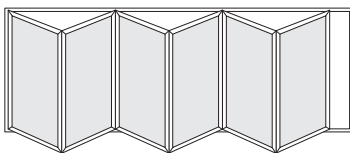

6 - 2 - 4 #

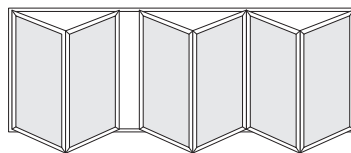

7 - 7 - 0

