

KAWNEER ALUMINIUM AA3720 BIFOLD DOORS

QUOTE/ORDER FORM

TRADE
ORDER FORM
MAY 2019

Enquiry please quote Order please process

Date Of Order _____ Date Required _____

Contact Details

Ordered By _____

Company Name _____

Address _____

Postcode _____

Tel _____

Email _____

Order No. _____

Your Reference _____

Delivery Date Requested _____

Site Contact

Company Name _____

Delivery Address _____

Postcode _____

Tel _____

Delivery option

Fully assembled with outer frame joints sealed

Kit form

If 6m wide or 2.2m high will be delivered in kit form

Overall frame width (mm) _____

Overall frame height (mm) _____

Door will be fitted in:

Sheltered location Exposed location

Opening direction Inward Outward

Flat sash as standard Round sash

Cill requirements included in overall frame height

104mm 159mm 199mm No cill required

Note: Cill platform height is 25mm included in the overall height. 10mm add leg on back edge of cill.

Glazing – square bead

Glazed Unglazed

28mm Square bead 32mm Square bead

44mm Square bead 36mm Square bead

28mm, Toughened, Low E, Argon Filled, Black Warm Edge Spacer

Touch-up paint

Door has to comply with Document Q of the Building Regulations (additional costs apply for the PAS 24 specification product). Please note, 3-2-1 and 3-1-2 can comply with PAS 24).

Keyed Alike

Bottom track detail

45mm standard threshold - with full weather rating

24mm low threshold – not severe weather rated

24mm add on 15mm coupler

not recommended for exposed locations

Stock Colour

RAL 7016 Textured Anthracite Grey

Available on a longer lead time

RAL 7015 Textured Slate Grey RAL 7016 Anthracite Grey Matt

RAL 7035 Textured Light Grey RAL 9016 White Gloss

RAL 9005 Textured Black RAL 9016 Textured White

RAL 7016 Textured Anthracite Grey outside/ RAL 9016 Textured White inside

RAL 7016 Anthracite Grey Matt outside/ RAL 9016 Traffic White Gloss inside

Other RAL Colour

Marine Grade Finish Yes No

Mandatory within 500 metres of the sea, tidal estuary or in a swimming pool or any other chemical or industrial environment.

1 x 5000 Aluminium trickle vent through 34mm add-on profile

(includes 20mm add on to head)

No Black White Grey

Internal Bifold Yes (Note: If bifold is internal, no drainage required).

10 Year Master Handles

White Black Grey

Satin Silver Chrome Polished gold




Locking intermediate handle/s – Black D Handle as standard

White Black Brushed Steel Satin Silver



Opening Configuration – viewed from outside

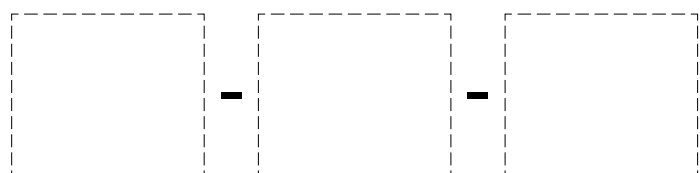

Total number of sashes

Number of sashes folding left

Number of sashes folding right

ALUMINIUM@KATUK.CO.UK WWW.KATUK.CO.UK KAT: 01625 439 666

